

# Drayton

## Digistat 1 Room Thermostat




Digistat 1, the successor to the original digital room thermostat, provides accurate electronic control with a display of actual room temperature

# Digistat 1 digital room thermostat





## Features

- Displays actual room temperature
- Heating 'ON' indicator
- Suitable for conventional or combi systems
- Battery powered (supplied)
- Selectable 16°C low limit
- Volt-free contacts
- Interchangeable with most room thermostats
- Suitable for conduit box or surface mounting
- Screws and wall plugs provided
- Double insulated

## Wiring connections

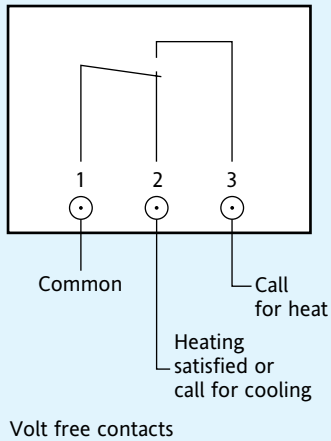

## Dimensions

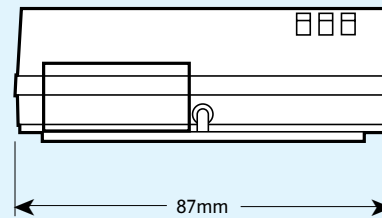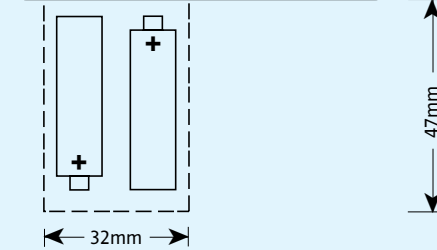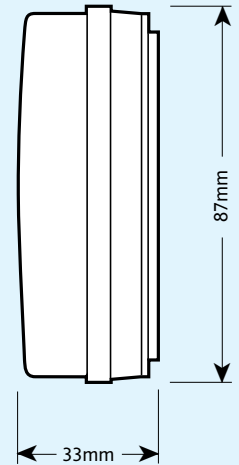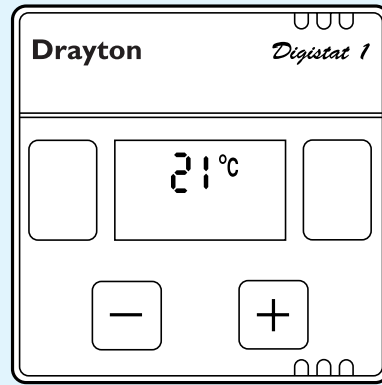

## Technical data

Power supply	Two type AA 1.5v alkaline cells (supplied)
Sensing element	Electronic
Ambient temperature	Operating – 0°C to 45°C Storage – 20°C to 50°C
Temperature range	5°C to 30°C, set in 1°C steps 16°C to 30°C, selectable
Switch rating	2 (1) 230v AC
Switch type	SPDT (voltage free) relay
Switch cycle rate	>8mins, typically
Differential	<0.6°C at 4°C per hour
Battery life	2 years typical
Wiring	Designed for fixed wiring only, to comply with current IEE regulations
Maintenance	No user maintenance should be attempted



## Climate Control Systems Europe

94 Farnham Road, Slough,  
Berkshire. SL1 4UH

Telephone: +44 (0) 845 130 5522

Facsimile: +44 (0) 845 130 0622

Technical Helpline: +44 (0) 845 130 7722

Website: [www.climate-eu.invensys.com](http://www.climate-eu.invensys.com)

Email: [customerservices@invensys.com](mailto:customerservices@invensys.com)

AVAILABLE FROM:

