


## N 50, GAS HOB, 60 CM, TEMPERED GLASS, BLACK T26NKP4S0

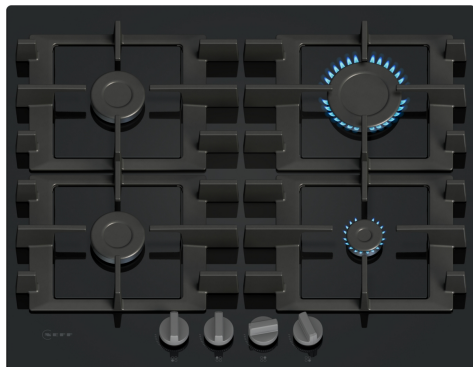

### Optional accessories

Z1365WX0	Wireless food thermometer
Z2402X0	Small pot support
Z2480X0	Simmer plate
Z9404SE0	4 pieces Set
Z9406SE0	6 pieces Set

The gas hob with semi-continuous pan supports that are suitable for dishwashers - for easy cleaning.

- ✓ Sword Dials: For easy, enjoyable control while cooking.
- ✓ Cast Iron Pan Supports: Maximum stability, easy handling, and dishwasher cleaning.
- ✓ Gas Safety Cut-Off: Safety first! No flame, no gas flow.
- ✓ Biomethane Ready: Power your hob with renewable biomethane gas.

### Features

#### Technical Data

Product name/family: .....gas hob w integrated controls  
 Built-in / Free-standing: ..... Built-in  
 Energy input: ..... Gas  
 Number of cooking zones: ..... 4  
 Type of control setting devices: ..... sword knobs  
 Required niche size for installation (HxWxD): ..... 45 x 560-560 x 480-490 mm  
 Width of the appliance: ..... 590 mm  
 Dimensions: ..... 57.4x590x520 mm  
 Dimensions of the packed product (HxWxD): . 141 x 651 x 578 mm  
 Net weight: ..... 13.2 kg  
 Gross weight: ..... 14.1 kg  
 Residual heat indicator: ..... Separate  
 Location of control panel: ..... Front  
 Basic surface material: ..... Tempered glass  
 Color of surface: ..... Black  
 Color of frame: ..... Black  
 Length electrical supply cord: ..... 100.0 cm  
 EAN code: ..... 4242004284581  
 Gas connection rating: ..... 7500 W  
 Fuse protection: ..... 3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz



## N 50, GAS HOB, 60 CM, TEMPERED GLASS, BLACK T26NKP4S0

### Features

#### Design

- tempered glass surface, black
- Cast iron pan supports with rubber feet

#### Usage convenience

- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

#### Burners and power

- 4 burner hob
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

#### Cleaning

- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.

#### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

#### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 57.4 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 7.5 KW

N 50, GAS HOB, 60 CM, TEMPERED GLASS, BLACK  
T26NKP4S0

Dimensioned drawings

