

Amala

Electric Shower - DuElec® Dual Outlet Kit



Product Codes

Amala DuElec® - 9.5kW - Black (Black Kit)	KEAMDU93
Amala DuElec® - 9.5kW - White (Chrome Kit)	KEAMDU91
Amala DuElec® - 9.5kW - Brushed Brass (Black Kit)	REAMDU97
Amala DuElec® - 9.5kW - Brushed Copper (Black Kit)	REAMDU99

Installation

- Inlet connection: 15mm diameter
- Outlet connection: 1/2" BSP male thread

Commissioning

- Simple 2 minute commissioning process

End User

- Choice of showering experience - divert water between a 5 spray pattern shower head and luxurious fixed rainfall shower head, or even use both together
- Easy to use - soft touch power buttons
- Start/stop push button
- Separate temperature dial control
- Phased shutdown - Flushes out preheated water after use to help reduce limescale build up
- 5 spray shower head with removable spray plate and 1.5m anti-twist hose
- 0.75m anti-twist diverter connector hose
- Suitable for cold mains only
- 2 year parts and labour guarantee
- Efficient A energy rating



Black



White



Brushed Copper



Brushed Brass



White (Chrome Kit)



Product Technical Sheet

Amala

Electric Shower - DuElec® Dual Outlet Kit

Shower

Temperature stability	Stabilised
Power ratings	9.5kW (240v)
Controls	Start/stop button, power buttons & temperature control dial
Visual indicators	Power-on and selected Power mode indicators
Inlet Connection	15mm male compression
Water Entry Points	Left hand side - top, bottom, back Right hand side - bottom, back
Cable Entry Points	Left hand side - top, bottom, back
Outlet Connection	½" BSP male thread
Plumbing System Compatibility	Cold mains only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min
Maximum Static Pressure	10 Bar
Approvals, Complies with	BEAB, CE, UKCA, BSI Kitemark, KIWA Reg 4
Guarantee	2 years



*Recommended minimum running pressure/flow for full performance 1 bar @8l/min

DuElec® Riser Rail Kit

Length	1007mm / 40inches
Diameter	20.5mm / 0.81 inches
Material	Stainless Steel
Finish	Matte Black or Chrome
Hose	1.5m Anti-twist (main hose) 0.75m (Connector hose)

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Amala DuElec® unit will aid optimum performance and maintain a valid guarantee

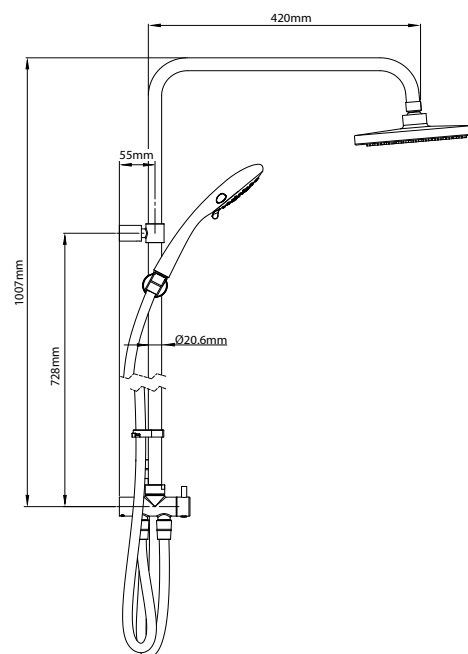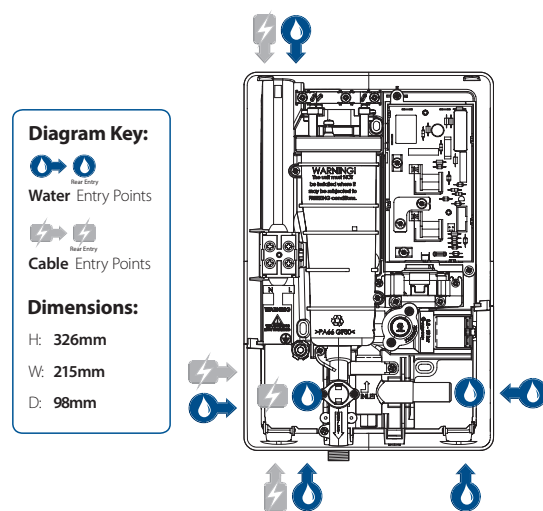

1.5m Anti-Twist Shower Hose Chrome
REHOSE150C
0.75m - 28100380



1.5m Anti-Twist Shower Hose Matte Black
TSHG150BLK
0.75m - 28100390



Isabel - Circular Fixed Shower Head Chrome
TSHFISABCH



Isabel - Circular Fixed Shower Head Black
TSHFISA13



8000 Series Shower Head Chrome
TSHE8RCCHR



8000 Series Shower Head Matte Black
TSHE8RCBLK

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers