


ONE YEAR GUARANTEE

Kit C Tundish

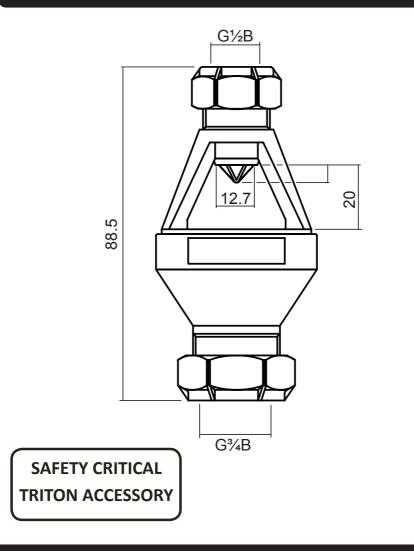

Dimensions are approximate

INSTALLERS PLEASE NOTE THESE INSTRUCTIONS ARE TO BE LEFT WITH THE USER

Tundish

Application

The use of a tundish meets the requirements for the Water Supply (Water Fittings) Regulations and Byelaws for sealed or unvented systems.

The discharge pipe from the pressure relief valves should pass through a tundish with an AUK3 air gap.

The tundish must be located within the same room, as near as possible to the pressure relief valve.

Important any discharge must be clearly seen and warn of a possible problem within the water heater.

INSTALLATION

The Tundish must be installed in accordance with water regulation and discharge safely into a trapped gulley or drain.

Before installing the tundish, flush the pipework through to remove any debris.

The Tundishes should be connected to the outlet connection of the pressure relief valve using 15mm pipework and fittings supplied.

The temperature of water discharge can approach 75°C, it is therefore **important** that the final discharge point will not cause injury to people if a sudden discharge occurs.

Triton Showers Triton Road Nuneaton Warwickshire CV11 4NR Customer Experience: 024 7637 2222 Trade Installer Hotline: 024 7637 8344 www.tritonshowers.co.uk E-mail: serviceenquiries@tritonshowers.co.uk technical@tritonshowers.co.uk

Triton is a division of Norcros Group (Holdings) Limited

For product guarantee information please go to www.tritonshowers.co.uk/help-and-support

TRITON reserve the right to change product specification without prior notice. E&OE. © TRITON SHOWERS 2020

Check out our full range of Showers

- Electric Showers Digital Showers Mixer Showers Power Showers Smart Showers
- Shower Towers

From Top Shower Brands

Mira Showers Aqualisa Showers Triton Showers

Gainsborough Showers

Shower Pumps can upgrade your showering experience even more

Stuart Turner Shower Pumps Salamander Shower Pumps Grundfos Shower Pumps

